

COMPENSATING CLAMPS



Double Wire Spring

Double Wire Spring clamps are ideal on rubber and PVC hoses. The spring effect compensates for diametrical variation and the complete circle guarantees a uniform radial pressure.


PERFORMANCE	Strength	
	Temperature	
	Speed	
	Weathering	
	Chemical	
Dynamic Range		

Applications

- Agricultural
- Irrigation
- White Goods
- General Industry

Materials – see section 10.3

- **W1** Zinc Plated Steel

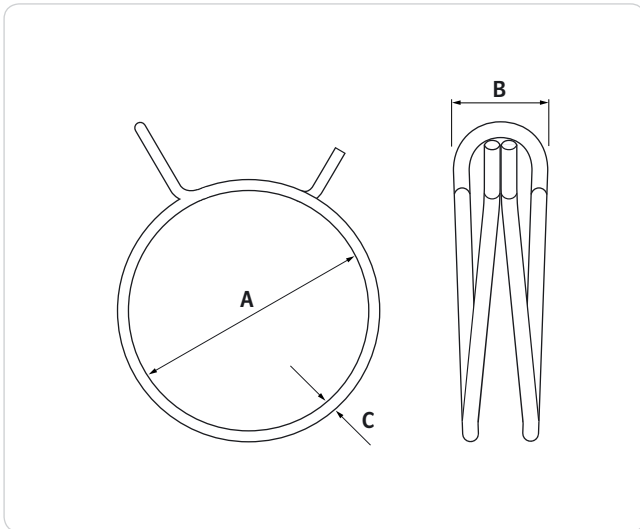

Installation Tools – see section 9.1



MT-SC-TP-01



MT-SC-FR-01

HCL Part No	Diameter Range (A) mm	Clamp Width (B) mm	Wire Diameter (C) mm	Box Quantity
DW-6.8	6.6 – 7.0	5.0	1.0	1000
DW-7.3	7.0 – 7.5			
DW-7.6	7.3 – 7.8			
DW-8.1	7.8 – 8.3	5.5	1.0	
DW-8.6	8.3 – 8.8			
DW-9.1	8.8 – 9.3			
DW-9.6	9.3 – 9.8	6.0	1.2	
DW-10.1	9.8 – 10.4			
DW-10.7	10.4 – 11.0			
DW-11.3	11.0 – 11.6	7.0	1.5	
DW-11.9	11.6 – 12.2			
DW-12.6	12.2 – 12.9			
DW-13.3	12.9 – 13.6	8.0	1.8	
DW-13.7	13.3 – 14.1			
DW-14.0	13.6 – 14.4			
DW-14.8	14.4 – 15.1	9.0	1.9	
DW-15.6	15.1 – 15.9			
DW-15.8	15.5 – 16.3			
DW-16.4	15.9 – 16.8	9.5	2.0	
DW-17.3	16.8 – 17.7			
DW-18.2	17.7 – 18.7			
DW-19.2	18.7 – 19.6	10.3	2.2	
DW-20.2	19.6 – 20.6			
DW-21.2	20.6 – 21.6			
DW-22.1	21.5 – 22.6	11.0	2.5	
DW-22.6	22.0 – 23.1			
DW-23.1	22.4 – 23.6			
DW-24.2	23.5 – 24.7			
DW-25.2	24.5 – 25.8			

All weights, dimensions & quantities are subject to a 2.5% tolerance. To add material selection to the HCL Part No: for W1, add "W1". Other sizes available on request.