

CABLE RETENTION

Nylon Earth Clamp – Ezybond® BS951-2009

Manufactured by HCL, the patented Ezybond® Earth clamp conforms to BS951-2009. It is quick and easy to assemble, with an innovative design, including a double grip jaw, conductor guide vanes and security locking tabs. Manufactured in Nylon 6.6, it also has excellent mechanical, chemical, heat resistant and self extinguishing properties.

PERFORMANCE	Strength	
	Temperature	
	Speed	
	Weathering	
	Chemical	
	Dynamic Range	


Applications

- Construction
- Plumbing
- Electrical



Materials – see section 10.3

- Heat/UV Stabilised ROHS compliant Nylon 6.6.

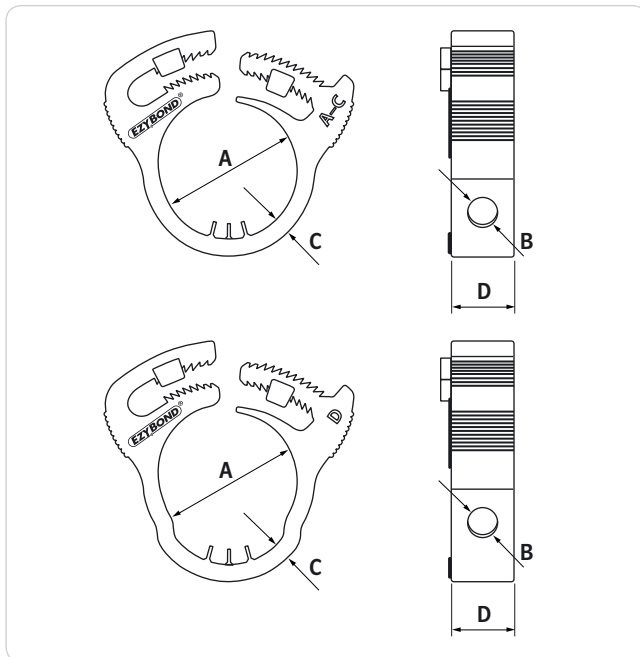

HCL Part No	Pipe Diameter (A) mm	Conductor Size (B)	Band Width (C) mm	Band Thickness (D) mm	Colour	Bag Quantity
EZB-15AC	15	A – B	11.9	3.2	Black	10
EZB-22AC	22	(2.5 – 6.0mm ²)	12.9	3.3		
EZB-15D	15	D	11.9	3.0	Grey	
EZB-22D	22	(10.0mm ²)	12.9	3.4		

All weights, dimensions & quantities are subject to a 2.5% tolerance. 10 safety labels included in each bag.

Ezybond® versus standard Earth Clamps

Ezybond® offers a much faster installation time when compared to standard Earth clamps. The resulting cost reduction is highly advantageous to all users, ranging from Electricians to OEMs.



Installation Tools – see section 9.1



MT-PL-01